




- REGUL** Steuerprint
Carte régulation
Main Control
- ALIM** Hauptstromversorgung
Alimentation 230V - 24VDC
Main power supply
- X11** Anschlussklemmen
Bornier principal
Mains terminals
- R1-3** Heizkörper
Corps de chauffe
Heating element
- K11** Schütz Sicherheit
Contacteur sécurité
Contactor of safety
- K21** Schütz Heizung
Contacteur chauffage
Contactor of heating elements
- S1 - S2** Sonde type K
(Arbeits-und Sicherheitsthermostat)
Sonde type K
(Thermostat de travail et de sécurité.)
Probe type K
(Control-and safety thermostat)
Weiss-blanc-white = (-)
Grün-vert-green = (+)
- SW21** Sicherheits- Endschalter
Switch sécurité
Safety switch
- Solas** Sonorer Alarm / Sicherheitsthermostat
Alarme sonore / thermostat de sécurité
Sound alarm / thermostat of safety
- E - F** Energiekontrollanschlusskl
Bornier système controle d'énergie
Energie control terminals
- SW22** Kontakt mit freipotential
Contact avec potentiel libre
Free potential contact
- M** Pumpe
Pompe
Pump
- Steuerseil-Câble commande - Cable of command**
- 2-1 = Weiss-Blanc-White = Solas (+)
2-2 = Braune-Brun-Brown = K11 (+)
2-3 = Grün-Vert-Green = NC
2-4 = Gelb-Jaune-Yellow = NC
2-5 = Grau-Gris-Grey = M (+)
2-6 = Rose-Rose-Pink = Solas (-)
2-7 = Blau-Bleu-Blue = 0V
2-8 = Rot-Rouge-Red = +24VDC
2-9 = Noir-Black = K21 (+)

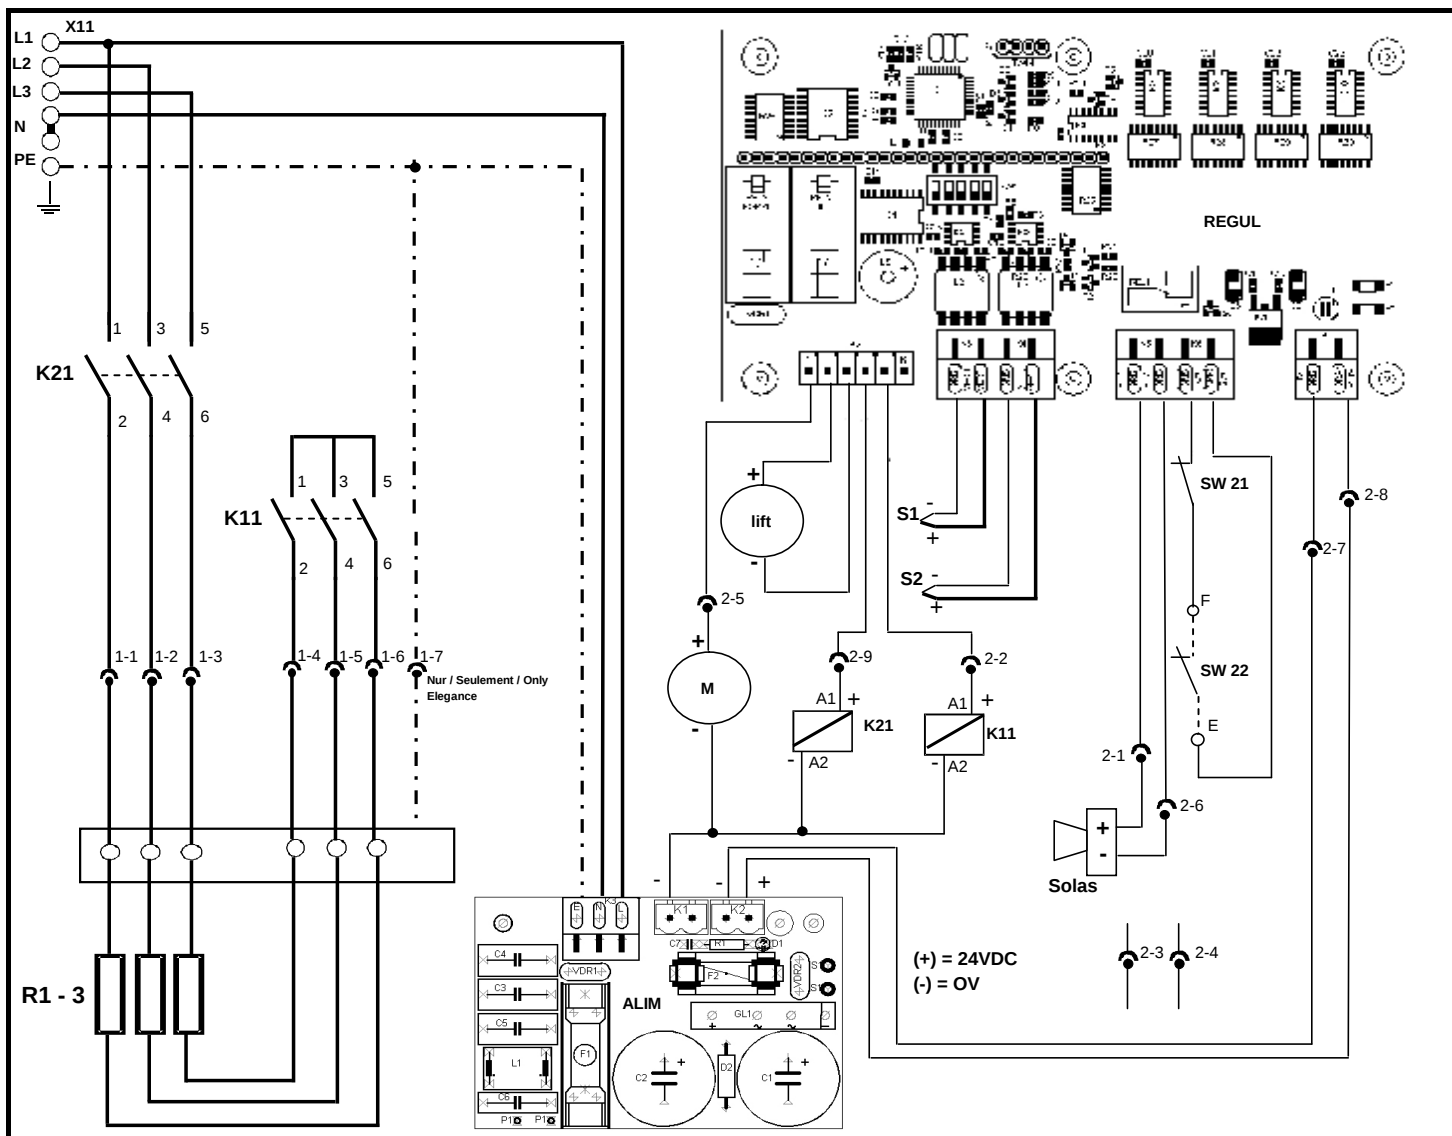

frifri
a FRANKE Company

VO5 M - Elegance M

3NAC 400 V	Visa	OB	215035
3L + N + PE	Date	01.11.2005	
50 - 60 hz	Index	a	